## (19) World Intellectual Property Organization International Bureau



## 

## (43) International Publication Date 31 May 2001 (31.05.2001)

#### PCT

# (10) International Publication Number WO 01/38005 A1

(51) International Patent Classification7: G02B 1/10 B05C 3/09,

(74) Agent: BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI).

(21) International Application Number:

PCT/FI00/01025

(22) International Filing Date:

24 November 2000 (24.11.2000)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

19992528

26 November 1999 (26.11.1999) FI

(71) Applicant (for all designated States except US): IT IN-NOVATIONS FINLAND OY [FI/FI]; Ainontie 33, FIN-01630 Vantaa (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): RUUTTU, Jari [FI/FI]; Ruukintie 4, FIN-10330 Billnäs (FI). TÖRN-ROOS, Filip [FI/FI]; Sirkkalankatu 24 C 15-17, FIN-20700 Turku (FI). (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,

TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

#### Published:

With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR COATING AN OPTICAL OBJECT, SUCH AS A MOBILE PHONE LENS

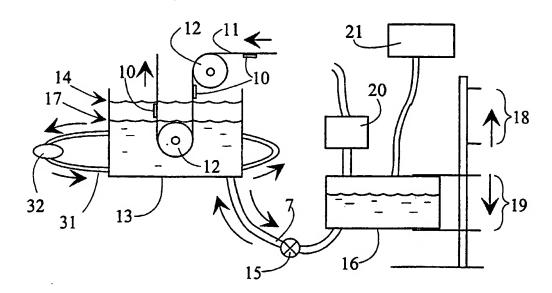

(57) Abstract: The invention relates to a method for coating an optical object (10, 22) such as a mobile phone lens etc., a spectacle lens etc., producing a wear-resistant hard coating on the surface of the optical object e.g. by means of UV varnish. The object (10, 22) is placed in a vessel (13) already containing or supplied with coating agent, and then the coating agent level (14) is lowered at a given rate under control, so that a coating agent layer remains on the surface of the object and is dried e.g. by UV radiation to form a wear-resistant surface.

1/38005 A1

WO 01/38005 PCT/FI00/01025

### Method for coating an optical object, such as a mobile phone lens

5

15

20

This invention relates to a method for coating an optical object, such as a mobile phone lens, a spectacle lens etc., producing a wear-resistant hard coating on the surface of the optical object by means of UV varnish, for instance.

All the methods known per se for coating optical objects have the drawback of entailing a very high error percentage, because the coating has not been applied evenly over the surface of the optical object. Conventional methods include spray painting, dipping an optical object into a varnish vessel or raising the varnish vessel to the optical object, with the object being stationary and the vessel moving up and down. The moving of an optical object or a vessel always generates small vibrations, which entail errors in the coating.

The object of the present invention is to provide a new type of method for coating optical objects. The method of the invention is characterised in placing the object in a vessel already containing or supplied with coating agent, and then the level of the coating agent is lowered at a given rate under control, so that a coating layer remains on the surface of the object and is dried e.g. by UV radiation, forming a wear-resistant surface. All tests have proved that the rate of lowering the coating agent level can be controlled exactly to the desired duration and even accelerated or retarded at the final stage by lowering the level through a throttle valve, for instance. The discharge of the coating agent from the vessel is completely stabilised and laminar. The method does not cause even minor vibrations.

Various embodiments of the invention are described in the dependent claims of the set of claims.

25 The invention is explained below by means of an example and with reference to the accompanying drawings, in which

figures 1 and 2 show a dip method known per se

figure 3 shows the connection of two vessels

figure 4 shows a level control system of one embodiment and

30 figure 5 shows the coating technique of another embodiment.

Figure 1 indicates with arrows how the object 1 is either lifted upwards as indicated by arrow 2 or the vessel 3 is lowered as indicated by arrow 4. In figure 2, the vessel

WO 01/38005 PCT/FI00/01025

2

3 has been lowered so that the object 1 has emerged from the coating agent and is subsequently dried. However, the method has proved to cause small vibrations, which produce visible undulating errors on the surface of the object.

When the vessel 5 in figure 3 is lifted and lowered as indicated by arrows 6, a laminar flow is produced in pipe 7 as indicated by arrows 8, and then the level of the coating agent in the vessel 9 will rise and sink without vibrations.

5

10

15

20

25

30

In figure 4 the object 10 is moved along a given path 11 to the vessel 13 guided by sheaves 12 and is stopped below the liquid level 14 of the coating agent, and then the coating agent is evacuated through the valve 15 into the tank 16 with the object remaining above the liquid level 17 in its totality. Then the object 10 is moved forwards along the path 11 to the following process step, i.e. the drying step. The tank 16 is then lifted into upper position 18 and the liquid level 17 is raised to point 14 using the valve 15. Meanwhile, the following object has been taken by the path 11 to a location below the level 14. The tank 16 is shifted into lower position 19, and the process steps above are repeated with the use of the valve 15. The tank 16 may be connected to a compressed air source 20, which generates overpressure in the tank, thus serving as a substitute for a shift of the tank into upper position 18. According to calculations, the coating of one object or of two adjacent objects takes about 15 seconds. Coating agent is added from the tank 21 into the tank 16 as it is consumed. The vessel 13 may be equipped with an additional liquid circulation system 31 comprising a filter 32, which purifies the liquid contained in the tank continuously.

Figure 5 shows how the object 22 is suspended from a chain conveyor 23. In this method the vessel is moved downwards as indicated by arrow 24 so that the object arriving on the chain conveyor moves above the vessel, and then the vessel is raised against stoppers 25, and will thus remain firmly in position. Coating agent is introduced into the vessel as indicated by arrow 26 implementing the methods mentioned above, and the liquid level is subsequently lowered to point 27, also using the methods above, and then the entire vessel is lowered so as to allow the chain conveyor 23 to move the object forwards and to bring the following object to a location above the tank. These process steps are repeated. When small bubbles or any dust particles arise on the liquid surface, they will flow over the edge 28 and through the filter 29 and back into the vessel through a sealable trough 30.

The inventions is obviously not limited to the example above, but may vary within the scope of the following claims.


#### Claims

5

25

WO 01/38005

- 1. A method for coating an optical object (10, 22), such as a mobile phone lens, a spectacle lens etc., producing a wear-resistant coating on the surface of the optical object e.g. by means of UV varnish, characterised in that the object (10, 22) is placed in a vessel (13) already containing or supplied with coating agent, and then the level (14) of the coating agent is lowered at a specific rate under control, so that a layer of coating agent remains on the surface of the object and is dried e.g. with UV radiation to form a wear-resistant surface.
- 2. A method as defined in claim 1, characterised in that the object (10) is moved guided by sheaves (12) along a given path (11) into a vessel (13) and is stopped below (14) the liquid level of the coating agent, and the coating agent level is then lowered so that the object will be located above the liquid level (17) in its totality, and then the object (10) is moved forwards and the process step is repeated for the subsequent object.
- 3. A method as defined in claim 1, characterised in that the object (22) is suspended from a chain conveyor (23), the vessel (13) being raised so that the object is totally immersed under the liquid level (14) in the vessel, and after this the coating agent level is lowered so that the object is located above the liquid level (27) in its totality, and then the vessel (13) is lowered (24) so as to allow the chain conveyor (23) to move the object forwards, and the subsequent suspended object takes a position above the vessel (13), and the process steps are repeated.
  - 4. A method as defined in any of the preceding claims. characterised in that the vessel (13) is connected with a hose (7) to a vertically movable liquid tank (16), and by moving the tank upwards, the liquid level in the vessel is regulated upwards, and by moving the tank downwards, the liquid level in the tank is regulated downwards.
  - 5. A method as defined in claim 4, characterised in that the tank (16) is connected to a compressed air source (20), which serves to generate overpressure in the tank.
- 6. A method as defined in any of the preceding claims, characterised in that the vessel (13) has been connected with a lateral trough (30) comprising a filter (29), through which the coating agent is brought into circulation and recirculated to the vessel (13).

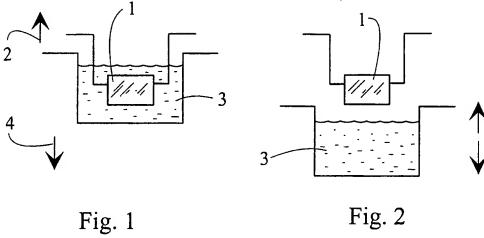

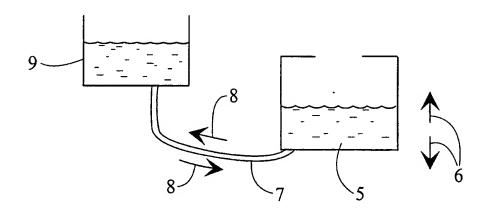


Fig. 3

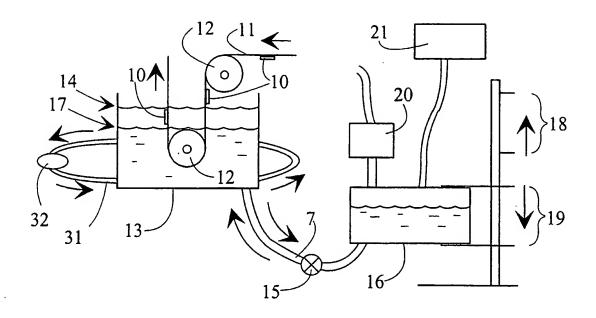


Fig. 4

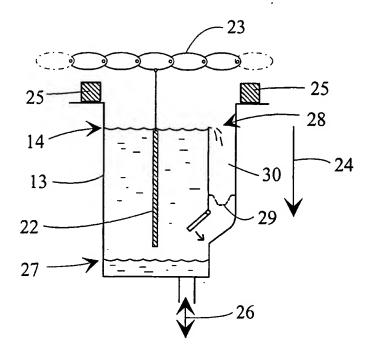


Fig. 5

### INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/01025

A. CLAS	SIFICATION OF SUBJECT MATTER								
IPC7:	B05C 3/09, G02B 1/10 o International Patent Classification (IPC) or to both na	single designation and IRC							
		tional classification and IPC							
	OS SEARCHED  ocumentation searched (classification system followed by	r classification symbols)							
		Chashication symbols							
	BOSC, GO2B tion searched other than minimum documentation to the	extent that such documents are included in	the fields searched						
	FI,NO classes as above	extent that such discullations are metados in	THE NAME OF BUILDING						
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)									
Electronic data base consulted during the international seatch (name of data base and, where practicable, seatch terms used)									
C. DOCUMENTS CONSIDERED TO BE RELEVANT									
Category*	Citation of document, with indication, where app	oropriate, of the relevant passages	Relevant to claim No.						
A	US 3675622 A (GRIFFIN), 11 July figures 1,2, claims 1-10,16	1972 (11.07.72),	1-3,6						
A	US 4204498 A (INVANCIC), 27 May figure 2, claims 1-3,5,6	1980 (27.05.80),	1,2,8,9						
			1						
	i 1		1						
			}						
Furth	er documents are listed in the continuation of Bo	C. X See patent family anne	x.						
* Special categories of cited documents:  "I" later document published after the international filing date or p "A" document defining the general state of the art which is not considered date and not in conflict with the application but cited to under-									
	f particular relevance application or patent but published on or after the international late	"X" document of particular relevance: the claimed invention cannot be							
"1." docum	and which may throw doubts on priority claim(s) or which is a catablish the publication date of another citation or other	considered novel or cannot be considered when the document is taken along	•						
special	reason (as specified) entreferring to an oral disclosure, use, exhibition or other	"Y" document of particular relevance: the considered to involve an inventive ste	p when the document is						
means "P" docum	ent published prior to the international filing date but later than	combined with one or more other such heing obvious to a person skilled in the	he art						
the pro	rity date claimed  e actual completion of the international search	"&" document member of the same patent family  Date of mailing of the international search report							
.7 Or (II)	- International scale								
21 Feb	ruary 2001	<b>26</b> -02- 2001							
Name and	mailing address of the ISA/	Authorized officer							
	Patent Office								
	, S-102 42 STOCKHOLM No. + 46 8 666 02 86	Igor Gazdik/sj Telephone No.     + 46 8 782 25 00							
· acanimic	. 10. 1 TO U 100 U 100	1 receptione 140. 740 & /82 23 00							

### INTERNATIONAL SEARCH REPORT

Information on patent family members

Form PCT/ISA/210 (patent family annex) (July 1998)

International application No.

05/02/01 | PCT/FI 00/01025

		<del></del>		05/02/01	<u></u>	00/01025
Patent document cited in search report			Publication date	Patent family member(s)		Publication date
S	3675622	A	11/07/72	NONE		
S	4204498	Α	27/05/80	NONE		
						•
			•			
				•		
				•		
						•
			•			